

INV

**FM2
POWER F**

USER

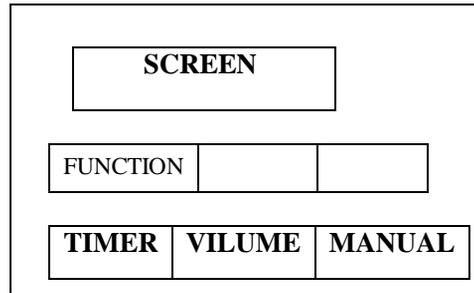
Please read over this manu

Function:

FM2000 DMX fog machine is widely used, and the spraying smoke is strong and makes unique living spot atmosphere, and has “ spraying air-logged ” technique.

Information

Heat-up Time: 10 minutes
 Time and ration control
 Smog oil capacity: 6L
 Spraying Distance: 15m
 Weight: 16.5KG
 Output: 30000cu.ff/min
 Voltage: AC110V, 220-250V 50/60Hz
 Powder: 3000W

**Circuitry controller operation**

- 1 . Connect the manual controller with the fogger, heat up the fogger, the screen display: “warming up”
- 2 . When finishing heating up, screen displays” ready to fazer”
- 3 . Press “manual” button, fogger spray our fog once. Press the button continuously; fog will be out without stop. When screen displays ”Volume 100%”, the output is the largest!
- 4 . Press “volume”, fog will be out continuously, screen displays ”volume.... %” to show the output. Output can be changed by “ ” or “ ”, other buttons can stop spray fog.
- 5 . Press ”function”, screen display ”man vol out...%”, the output can be changed. Press ”function” twice, screen display ”interval set...s”, the interval time can be changed.
- 6 . Press ”function” three times, screen displays “duration set ...s”, the duration time for continuously output can be changed

Attention:

- Press “Timer”, screen displays interval...s”, screen displays the interval time.
- Please obey all notices about operation. Safe and repair to avoid getting an electric shock and keep the excellent effect.
- Keep clean
- Use in door.
- The power must same as located.
- Put in the horizontal direction and don’t incline and place upside down.
- Power off or pull out plug after use.
- No waterproof, if there are some humidity, water or fog liquid in it, please switch off power and contact distributor as soon as possible.
- There are no spare parts with machine. If you need to repair it, please contact distributor or professional repair works.

Avoid fire

- Only for adults operate. Equip it over the touch of children and pay more attention during operation.
- Don’t spray it to people directly and far away fire.
- The temperature of smoke is very high so that keep the space between machine and other material things more than 100cm.
- Put the machine at a drafty place and don’t cover the cool holes to keep the best cool effect. Keep the space between the smoke machine and around things more than 20cm and between smoke machine and tinder more than 20cm. And without easily burnt things within 300cm

Avoid explode:

- Don’t add tinder liquid such as oil, gas, perfume
- Pay more attention to all notices sign and operation
- Please use the high quality fog liquid recommended
- get blast or spray oil.
- Often check whether there has enough fog liquid
- Get out all fog liquid before transport or post.
- Don’t eat fog liquid otherwise to see the doctor
- eyes once fog liquid touches them.

Remove package and check:

1. Open carton to check whether all necessary
- Please contact distributor if there is something
2. Check the appearance of machine and packaging
- damage. Please contact distributor once you

Installation:

1. Take away all pack material especially the
2. Set in the horizontal direction and open the
3. Add high quality fog liquid in the machine
- fog liquid will damage fog machine.
4. Plug the plug of remote console in the socket

Operation:

1. Connect the power line to the power socket
- machine heat. The red LED of line console
2. Press red key, the machine will spray fog
3. The red LED of remote console light
- itself.
4. Can set the machine at a high place (with
- people directly and the lean angle should
5. Often check whether there has enough fog
- damage to the machine if there has no fog
6. If the fog is small, plum has noise or the
- liquid, fuse, the connector of remote console
- solved after check these parts, please stop

Repair:

- Please clean the fog machine timely to avoid
- charge.
- Don’t make the fog machine be dirty. Screw the
- After about 40 hours continually use, please
- the dirty in refractory pipe.
- Disassemble the spray mouth and use vinegar
- Reequip the spray mouth after cool and add fog

Others:

- Clean timely to extend the lifespan of machine
- Use dry cloths to clean the machine and keep dry
- <http://www.fogmachine.com>
- <http://www.fogmachine.com>
- t/dym_machine_generator/