

AT4022 OMNIDIRECTIONAL CONDENSER MICROPHONE

(4°) S E R I E S



- Outstanding performance and rugged construction, ideal for critical studio & live applications
- High SPL handling and wide dynamic range
- Flat, extended frequency response
- Switchable 80 Hz hi-pass filter and 10 dB pad
- Omnidirectional polar pattern provides maximum ambient pickup
- Low-self noise perfectly suited for digital recording equipment
- Exceptional reproduction of low-frequency sounds
- Low-mass element for superb transient response

The AT4022 is intended for use in professional applications where remote power is available. It requires 48V DC phantom power, which may be provided by a mixer or console, or by a separate, in-line source such as the Audio-Technica AT8801 single-channel or CP8506 four-channel phantom power supplies.

Output from the microphone's XLRM-type connector is low impedance (Lo-Z) balanced. The signal appears across Pins 2 and 3; Pin 1 is ground (shield). Output phase is "Pin 2 hot" – positive acoustic pressure produces positive voltage at Pin 2.

To avoid phase cancellation and poor sound, all mic cables must be wired consistently: Pin 1-to-Pin 1, etc.

An integral 80 Hz hi-pass filter provides easy switching from a flat frequency response to a low-end roll-off. The roll-off position reduces the microphone's sensitivity to popping in close vocal use. It also reduces the pickup of low-frequency ambient noise (such as traffic, air-handling systems, etc.), room reverberation and mechanically-coupled vibrations.

Avoid leaving the microphone in the open sun or in areas where temperatures exceed 110° F (43° C) for extended periods. Extremely high humidity should also be avoided.

AT4022 SPECIFICATIONS†


ELEMENT	Fixed-charge back plate permanently polarized condenser
POLAR PATTERN	Omnidirectional
FREQUENCY RESPONSE	20-20,000 Hz
LOW FREQUENCY ROLL OFF	80 Hz, 12 dB/octave
OPEN CIRCUIT SENSITIVITY	-34 dB (19.9 mV) re 1V at 1 Pa*
IMPEDANCE	250 ohms
MAXIMUM INPUT SOUND LEVEL	146 dB SPL, 1 kHz at 1% T.H.D.; 156 dB SPL, with 10 dB pad (nominal)
NOISE†	13 dB SPL
DYNAMIC RANGE (typical)	133 dB, 1 kHz at Max SPL
SIGNAL-TO-NOISE RATIO†	81 dB, 1 kHz at 1 Pa*
PHANTOM POWER REQUIREMENTS	48V DC, 3.0 mA typical
SWITCHES	Flat, roll-off; 10 dB pad
WEIGHT	124 g (4.4 oz)
DIMENSIONS	144.0 mm (5.67") long, 21.0 mm (0.83") maximum body diameter
OUTPUT CONNECTOR	Integral 3-pin XLRM-type
ACCESSORIES FURNISHED	AT8405a stand clamp for 5/8"-27 threaded stands; windscreen; protective carrying case

†In the interest of standards development, A.T.U.S. offers full details on its test methods to other industry professionals on request.

*1 Pascal = 10 dynes/cm² = 10 microbars = 94 dB SPL

† Typical, A-weighted, using Audio Precision System One.

Specifications are subject to change without notice.

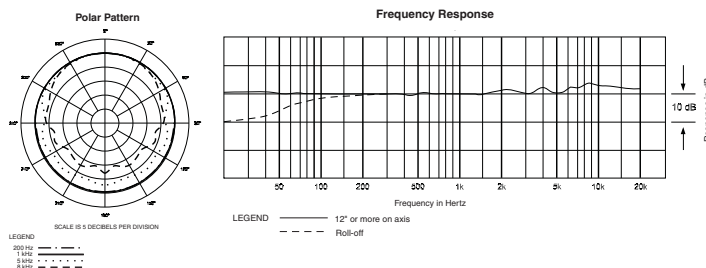

 **audio-technica**

Audio-Technica U.S., Inc., 1221 Commerce Drive, Stow, Ohio 44224
http://acctech.ru/cat/kondensatornye_mikrofony_vokaln/
 Audio-Technica Limited, Old Lane, Leeds LS11 8AG England
www.audio-technica.com

P52065 ©2008 Audio-Technica U.S., Inc. Printed in Taiwan

