



Wharfedale Pro

Your full user manual can also be downloaded from www.wharfedalepro.com

Titan 8

QUICK START GUIDE


SPECIFICATIONS

Model Name	TITAN 8
System Type	Passive
Configuration	8" 2-way
Frequency Response (+/-3 dB)	70 - 20 kHz
Frequency Range (-10 dB)	65 - 20 kHz
Sensitivity (2.83 v / 1 m)	96 dB
Calculated Maximum SPL @1 m	124 dB
System Rated Impedance	8 Ω
Low Frequency Transducer	
Size	203 mm / 8"
Voice Coil Size	38.86 mm / 1.53"
Rated Impedance	8 Ω
LF Power (re:AES2-2012)	150 W
High Frequency Transducer	
HF Driver Type	Compression Driver
Voice Coil Size	25 mm / 1"
Exit Size	30 mm / 1.2"
Diaphragm Material	Mylar
Rated Impedance	8 Ω
HF Power (re:AES2-2012)	20 W
Nominal Coverage (H x V)	Elliptical waveguide 90° x 60°
Power	
System Continuous Power	150 W
System Programme Power	300 W
System Peak Power	600 W
Crossover frequency	2-way 2.4 kHz / Linkwitz-Riley
Input Connector	2 x NL2 (speakON compatible) 2 x 1/4" Jack
Hardware	
Pole Mount	35 mm with lock screw
Handles	1 on side
Mounting points	M6 * 8
Enclosure	
Enclosure Material	Trapezoidal / Polypropylene
Finish	Grey, Black, White
Grille Material & Finish	1.2 steel
Dimensions - Unpacked	
Height	396 mm / 15.59"
Width Front	266 mm / 10.47"
Width Rear	266 mm / 10.47"
Depth	221 mm / 8.7"
Dimensions - Packed	
Height	463 mm / 18.2"
Width Front	325 mm / 12.8"
Width Rear	325 mm / 12.8"
Depth	282 mm / 11.1"
Weight	
Net Weight (kg / lbs)	5.5 kg / 12.1 lbs
Gross Weight (kg / lbs)	7.5 kg / 16.5 lbs


PRODUCT FEATURES

- 8" passive
- 1.0" HF compression driver
- 150 Watts AES (RMS)
- 300 Watts Programme
- 600 Watts Peak
- 124 dB Max SPL @ 1 meter

OVERVIEW

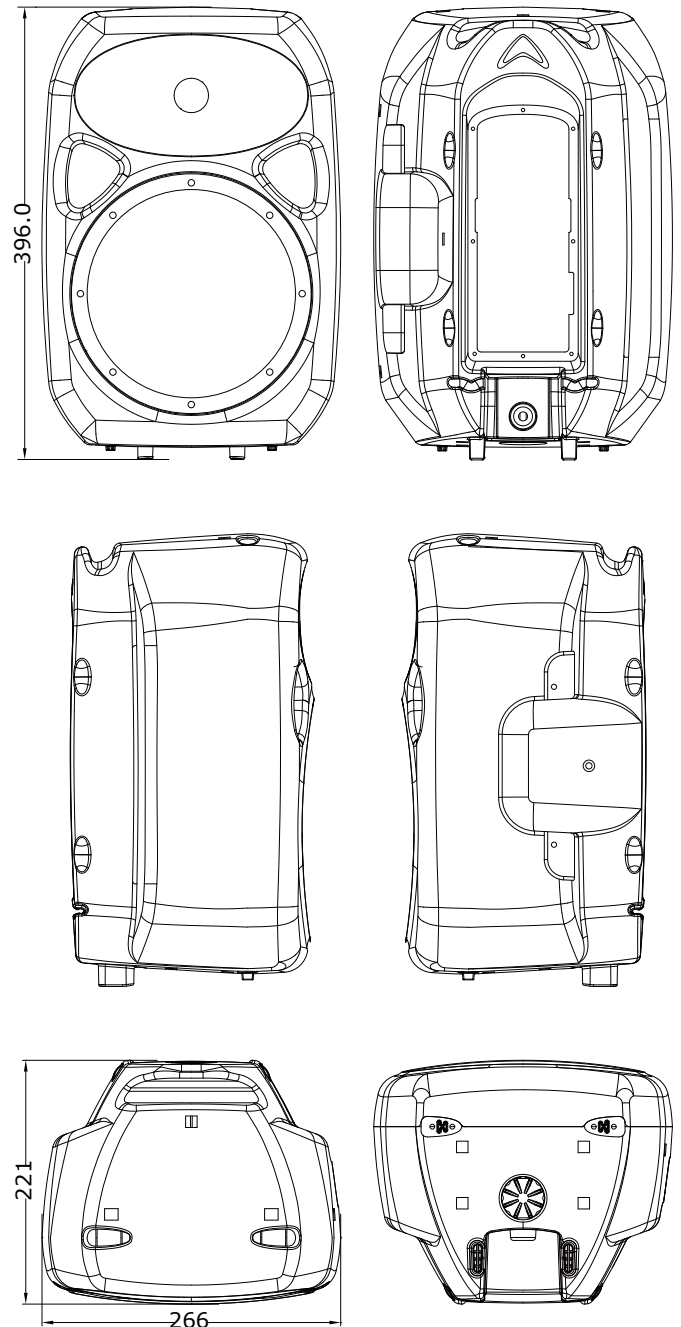


Note : Specifications may be subject to change without notice.

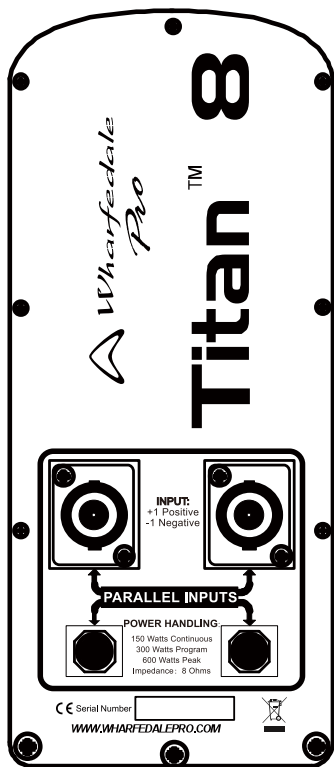


CONNECTION DIAGRAM #1

Titan two channel setup

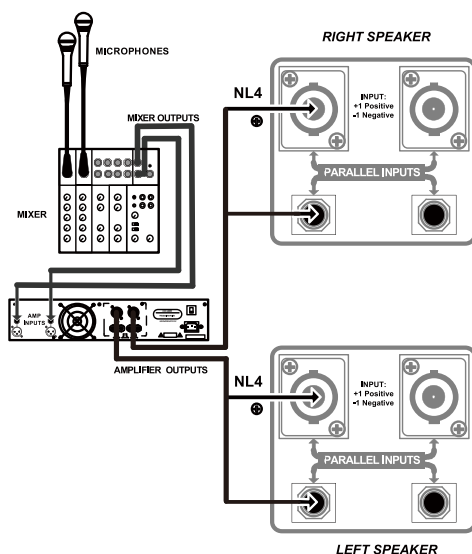

CONNECTION DIAGRAM #2


Titan mono front of house+stage monitor setup

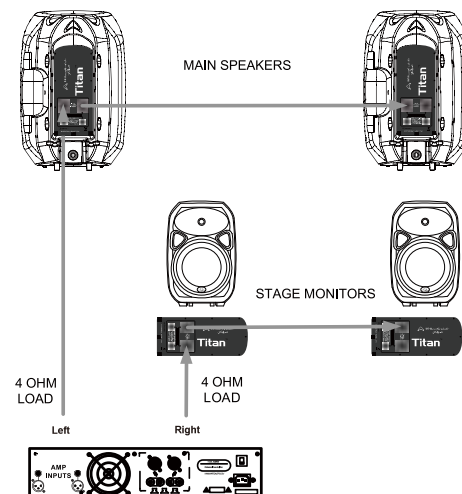

NOTE: This configuration represents a 4 ohm load to each output channel of the amplifier


CONNECTION DIAGRAM #3

Using the Titan with a passive subwoofer

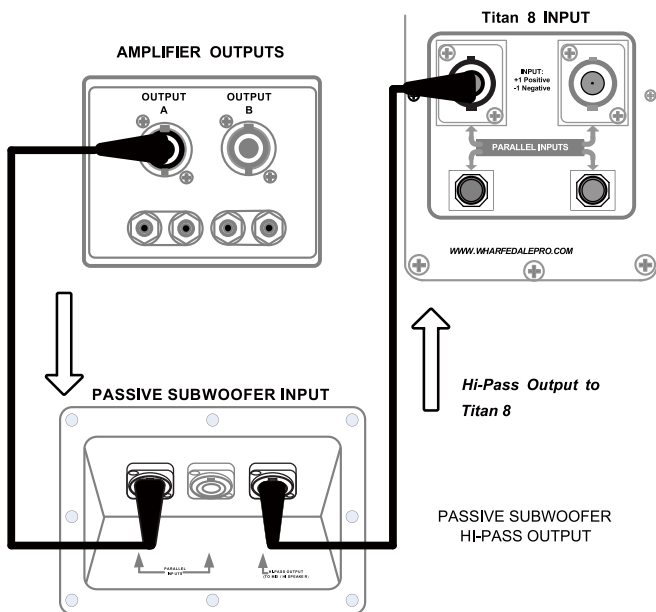

CONNECTION DIAGRAM #4

Using the Titan 8 in a BI-amp system

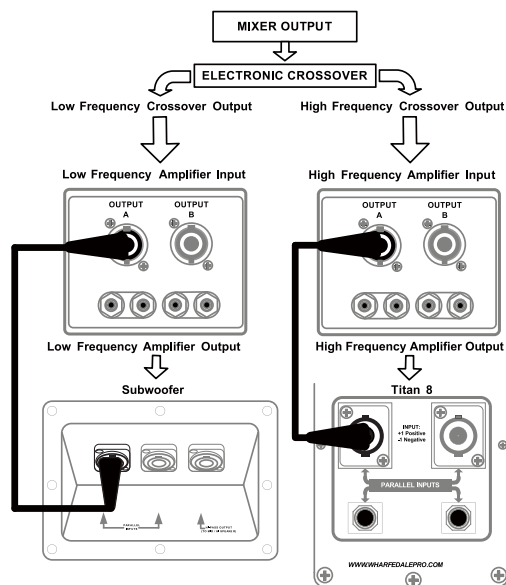

WHARFEDALE PRO LIMITED WARRANTY

Wharfedale Pro products are warranted of manufacturing or material defects for a period of three years from the original date of purchase. In the event of malfunction, contact your authorised Wharfedale Pro dealer or distributor for information.

Please be aware that the warranty details may differ from country to country. Contact your dealer or distributor for information (available at www.wharfedalepro.com). These terms do not infringe your statutory rights.



WHARFEDALE PROFESSIONAL

IAG House, 13/14 Glebe Road, Huntingdon, Cambridgeshire, PE29 7DL, UK
www.wharfedalepro.com

Wharfedale Professional reserves the right to alter or improve specifications without notice.
 All rights reserved © 2023 Wharfedale Pro. Wharfedale Pro is a member of the IAG Group.